



## 1. Package Contents

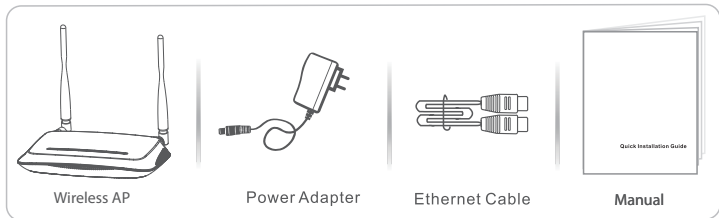

## 2. Hardware Connection

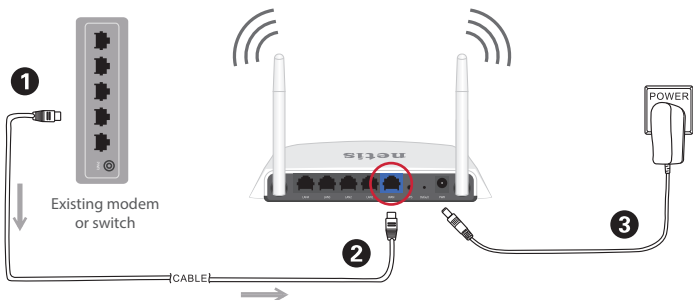

1. Connect the provided Ethernet cable to your existing Internet Modem or Switch
2. Connect the other end of the same cable to the WAN port (blue) on the FreshIQ AP
3. Plug the provided Power Adapter into the PWR jack of the FreshIQ AP the other end to a standard electrical socket. Please allow a minute to finalize the connection.